### FlexScan EV2360





The all-round monitor for the office. The monitor's viewing angle, contrast ratio and brightness help deliver superb ergonomics for everyday use in the office. The clear display with an aspect ratio of 16:10 and a resolution of 1920 x 1200 pixels boosts work productivity. Visual elements and colours are displayed crisply and clearly. The EV2360's optional Auto EcoView function automatically adjusts the screen's brightness. This reduces energy consumption and lowers CO2 emissions from power generation. As an added bonus, having the right brightness levels helps prevent distracting glare. This way, both the user and the environment benefit. The EV2360 is targeted at companies, government agencies and home users who are looking for a high-quality monitor.

- 22.5" LCD monitor with a 16:10 aspect ratio and IPS technology for outstanding image quality
- Bezel only 1 mm: amazingly compact and ultra-elegant design
- Flicker-free image reproduction thanks to hybrid brightness control
- Auto EcoView and EcoView Optimizer deliver maximum power savings and superb ergonomics
- Optimised antireflection properties and flexible positioning
- USB 3.1 hub with one upstream and two downstream ports
- OisplayPort, HDMI and D-sub signal inputs
- Proven to be environmentally friendly and produced in a socially responsible way
- 5-year warranty for highest investment security


### FlexScan EV2360



### **Design** A pleasing sight on any desk

### **Elegant design**

The monitor's appearance can be the key to creating a pleasant working atmosphere. Whether you are at home or in the office, the monitor's virtually frameless design and ergonomic functionality allows it to fit naturally into your workplace environment. The housing is available in both an elegant black and in white, with matching white cables.

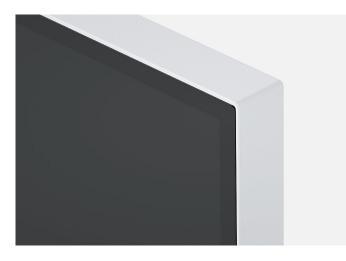

### Image quality Precise, high-contrast, bright and crisp screen

## Maximum image quality thanks to the IPS panel

The monitor is capable of all three key elements of excellent image quality: excellent resolution of 1920 x 1200 pixels, maximum contrast of 1000:1, and stable brightness of up to 250 cd/m<sup>2</sup>. That means you will experience razor-sharp text contours, brilliant graphics, and clear images. Thanks to the high-quality IPS panels with LED backlight, contrasts and colours remain stable from every viewing angle.



#### Precise color control

An image can only be perfect if the colors are, too. This is why EIZO monitors have a 10-bit look-up table at a minimum, which allows the color information to be assigned much more precisely than with conventional 8-bit LUTs. The finest color gradations ensure that gradients are always perfectly displayed, while also offering customised adjustment options. For example, you can adjust the white balance from 4000 K to 10 000 K in 500-K intervals.





Look-Up-Table with 10 and more bit

Look-Up-Table with 8 bit

#### Overdrive to quickly change images

The overdrive function accelerates the switching time so that gray-grey changes take place in just 5 ms on average. You can watch movies and fast image changes without annoying afterglow. When scrolling and positioning windows or images, the display is legible in fractions of a second - faster than it can be perceived. Power consumption and energy efficiency are always in view.





### **Ergonomics** Working in a relaxed manner

#### Easy on the eyes with Auto EcoView

At day, at night, bright, dark: No matter when and how you work, the Auto EcoView function continuously measures changes of the ambient light and optimises the monitor with ideal brightness values automatically by using a sensor. The benefits: Annoying glare is reduced, your eyes will not get tired as quickly. A special two-point control takes into account the brightest and darkest environment over the course of the day with the respectively desired screen brightness. Another plus: the automatic brightness adjustment can significantly reduce power consumption.

Of course, you can also continue to configure the monitor manually. EcoView Index is used for orientation on how environmentally friendly and economical your settings are.



During the day



In the evening


#### FOR THE SAKE OF THE EYES Flicker free

To help protect your eyes, EIZO has developed a hybrid technology to control the backlight. This combines the benefits of the otherwise standard PWM (pulse width modulation) and DC (direct current) control. The PWM control uses much higher frequencies than standard PWM methods. The result: a flicker-free viewing experience while maintaining picture quality and colour stability. In addition, compared to pure DC control, you can adjust the brightness to less than 1% of the maximum value in darkly lit rooms. The benefit: Your screen remains free from flicker and glare even under these conditions.

The flicker-free and low blue light content of the EIZO FlexScan monitors is certified by TÜV Rheinland.

## Anti-glare coating: more image, less reflection


The EV2360 offers a perfect, non-glare surface. By minimising glare by diffusing the reflected light, the EV2360 effectively protects your eyes from straining. This keeps your eyes from getting as tired and allows you to sit comfortably in front of the monitor, without having to sit in a forced position to prevent glare.

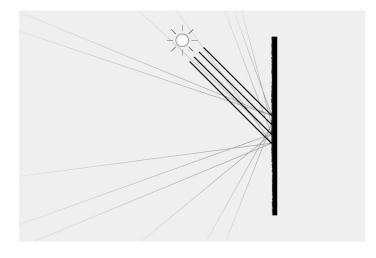

#### **Ergonomic stand**

Our screens offer continuous height adjustment. Depending on the model, they can even be lowered to the base plate of the stand. This guarantees the best possible ergonomics, regardless of whether the user is sitting or standing in front of the screen. You can also swivel, rotate and tilt the monitor base to the position that is most comfortable for your posture.

The EV2360 can also be rotated into the portrait format, which is a great advantage for tethered shoots of people in the portrait mode, for example.

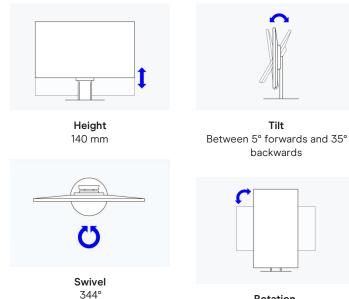

Rotation clockwise and anti-clockwise



### Variety of ports Best connectivity

#### One monitor, many ports


It couldn't be easier: Most end devices, such as PC, laptop, mouse, keyboard or headphones, can be connected directly to the monitor, thanks to its wide range of signal interfaces and ports. This makes your daily work easier and ensures a tidy desk.



### Software and ease of use Features for greater comfort

# Preset color modes: optimized display at the touch of a button

Preset color modes optimize the viewing of images, texts or videos. Because it makes a difference whether you are watching a video, looking at a picture, surfing the net or writing texts. At the touch of a button, you can set the respective preset for brightness, gamma correction and color temperature. An example: Paper mode simulates the pleasant contrast of printed paper, making reading easier on the eyes and preventing fatigue.

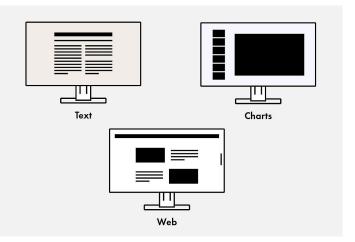


#### **Operation made easy**

Electrostatic switches are integrated into the front of the EV2360 instead of mechanical buttons. This ensures ease of use while also giving the monitor an extremely elegant look.

With the Button Guide, you have all functions at a glance. One touch of the control panel is enough, and the function assignment of the buttons is displayed. Your advantage: clarity of operation and a clean, uncluttered design.

The speakers and all the controls are also built into the bezel, pointing forward in the direction of the user. They are fully integrated into the monitor's flat, nearly frameless design to offer an excellent user experience.

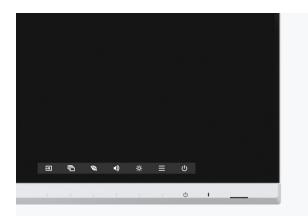



#### MONITOR CONTROL AND ADMINISTRATION

#### Screen InStyle

In addition to the on-screen menu, you can conveniently control the EV2360 by using the Screen InStyle software on a PC. The configuration options include color reproduction, energy saving options, and ergonomic functions. In multi-screen systems, the settings can be applied synchronously to all connected screens with Screen InStyle.

Learn more about Screen InStyle here


#### SOFTWARE FOR MONITOR CONTROL BY ADMINISTRATORS Screen InStyle Server

System administrators can centrally manage and control monitors connected in the network with Screen InStyle installed using the Screen InStyle Server application. This optimises power consumption and simplifies asset management of the monitors.

Learn more about Screen InStyle Server here

#### COMPANY-WIDE DEFAULT SETUP Monitor Configurator

Workload reduction for administrators: The software allows you to create a default setup for all relevant monitor settings. This setup can be distributed to the connected monitors via the local network which facilitates the roll-out process.

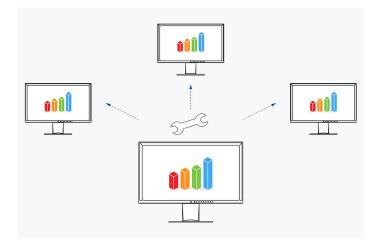

### Sustainability Environmentally and socially conscious production

#### Save energy effortlessly

EIZO monitors are equipped with sophisticated energysaving functions.

#### Up to 50% less power consumption

The Auto EcoView function automatically adjusts the brightness of the screen to changes in ambient light. This saves electricity compared to a monitor that is operated at a constant brightness. Of course, you can still adjust the monitor manually. The EcoView index serves as a guide to how environmentally friendly and economical your setting is.

The EcoView Optimizer automatically reduces the backlight in dark images, thereby reducing power consumption. At the same time, the signal is amplified and the color tone values are adjusted. The result: you experience the usual image quality with lower consumption.

These EcoView technologies reduce overall power consumption by up to 50%\* compared to the display at maximum brightness. Another plus: the automatic brightness adjustment can be easy on your eyes.

\* Typical power consumption when no USB Power Delivery is used.





## Zero-watt consumption thanks to the power switch

The monitors have an integrated mechanical power switch, which is extremely practical and energy-saving: If you switch off the monitor using the power switch, the device will stop consuming any power at all. Moreover, it consumes a maximum of 0.5 watt in standby mode.



#### Comprehensive product sustainability

FlexScan monitors from EIZO are produced in accordance with international environmental regulations and in a socially responsible manner. Suppliers along the supply chain are carefully selected and have also committed themselves to this responsibility. During the design process, attention was paid to the low use of resources with high-quality components and materials as well as careful production. In addition, FlexScan monitors protect resources and the climate thanks to their long service life, warranty and repairability.

Read detailed information about product sustainability here.



#### Environmentally friendly use of materials

Reducing the use of volatile organic compounds (VOCs) found in material production, such as some paints, is a global concern.

Through years of research, EIZO has succeeded in achieving a smooth, nearly homogeneous color and texture in its monitor housings without the use of varnish.



#### Collective packaging on demand

Depending on the quantity and delivery time, EIZO offers an alternative packaging option with four monitors and four separate stands in one shipping unit each.

This reduces packaging waste, increases shipping efficiency and shortens unpacking and installation time.



Space-saving collective packaging: 1) monitors, 2) stands





# Compliance with standards and guidelines

The monitor is certified according to important and allencompassing sustainability standards such as TCO Certified Generation 9, EPEAT and ENERGY STAR<sup>®</sup>. The EV2360 is a safe investment, when taking into account issues such as ESG (Environmental, social and corporate governance) or SDG (Sustainable Development Goals) from the United Nations and following the necessary guidelines.



### Warranty Highest investment security

#### Five-year warranty

EIZO grants a five-year warranty. This is possible thanks to the highly developed production process based on a simple principle of success: sophisticated and innovative technology, made from high-end materials.





### FlexScan EV2360

## **Technical Data**

| GENERAL  |  |
|--|--|
| Item no.   | EV2360-BK<br>EV2360-WT   |
| Case color   | Black<br>White   |
| Areas of application                                     | Office   |
| Product line   | FlexScan   |
| Areas of application                                     | Large and medium-sized companies, Private user $\boldsymbol{\vartheta}$ small business, Finance  |
| Specific system requirements                             | None, compatible with most computers and operating<br>systems including macOS and Windows  |
| EAN  | 4995047055198<br>4995047055204   |
| SCREEN   |  |
| Screen size [in inches]                                  | 22.5   |
| Screen size [in cm]                                      | 57.2   |
| Format   | 16:10  |
| Viewable image size (width x height)<br>[in mm]          | 488.2 x 297.2  |
| Ideal and recommended resolution                         | 1920 x 1200  |
| Pixel pitch [in mm]                                      | 0.254 x 0.254  |
| Pixel density [in ppi]                                   | 101  |
| Supported resolutions                                    | 1920 x 1200, 1920 x 1080 (Full HD), 1680 x 1050, 1280 x 1024, 1024 x 768, 800 x 600, 720 x 400, 640 x 480  |
| Panel technology   | IPS  |
| Max. viewing angle horizontal                            | 178  |
| Max. viewing angle vertical                              | 178  |
| Number of colors or greyscale                            | 16.7 million colors (D-Sub, 8 Bit), 16.7 million colors (DVI<br>8 Bit), 16.7 million colors (DisplayPort, 8 Bit), 16.7 million<br>colors (HDMI, 8 Bit) |
| Color palette/look-up table                              | 1.06 billion color tones / 10 Bit  |
| Max. color space (typical)                               | sRGB   |
| Max. brightness (typical) [in cd/m²]                     | 250  |
| Max. dark room contrast (typical)                        | 1000:1   |
| Response time grey-grey alternation<br>(typical) [in ms] | 5  |
| Backlight  | LED  |
| CONNECTIONS  |  |
| Signal inputs  | D-Sub, DisplayPort (HDCP 1.3), HDMI (HDCP 1.4)   |
| USB specification  | USB 5Gbps (USB 3)  |
| USB upstream ports                                       | 1 x type B   |
| USB downstream ports                                     | 2x type A  |
| Graphic signal   | RGB Analog, DisplayPort, HDMI (RGB, YUV)   |
| Sync formats   | Separate   |
| Audio input  | 3.5 mm stereo jack, DisplayPort, HDMI  |
| Audio / headphone output                                 | 3.5 mm stereo jack   |

| /White point, Gamma, Overdrive, Colour tone, Colour saturation, Resolution, Scaling, OSD language, Signa input, All EcoView functions, Volume     Button Guide   ✓     Integrated power unit   ✓     ELECTRICAL DATA   Frequency     Display Port: 31-75,5 kHz/59-61 Hz; HDMI: 15-75,5 kH 2/59-61 Hz; Power consumption (typical) [in watts]   11   | FEATURES & OPERATION                  |  |
|---|---------------------------------------|--|
| Auto EcoView   ✓     EcoView Index   ✓     EcoView Optimizer   ✓     Doverdrive   ✓     No flickering   ✓     HDCP Decoder   ✓     Automatic signal input recognition   ✓     Built-in speakers   ✓     On-screen menu languages   de. en, fr. es, it, Se     Adjustment options   Color Mode, Brightness, Contrast, Color temperatu<br>/White point, Gamma, Overdrive, Colour tone, Colo<br>saturation, Resolution, Scaling, SOS language, Signatinput, All EcoView functions, Volume     Button Guide   ✓     Integrated power unit   ✓     ELECTRICAL DATA   Frequency     Power consumption (typical) [in<br>watts]   11     Maximum Power Consumption [in<br>watts]   37 (at maximum brightness with all signal inputs and<br>USB ports in use)     Max. Power consumption in stand-by<br>mode [in watts]   0.5     Power consumption with power   0     switch off [in watts]   0     Power supply   AC 100-120 V / 200-240 V, 50/60 Hz     Power supply   AC 100-120 V / 200-240 V, 50/60 Hz     Power supply   AC 100-120 V / 200-240 V, 50/60 Hz     Power supply   AC 100-120 V / 200-240 V, 50/60 Hz     Power supp  | Preset color/greyscale modes          |  |
| EcoView Index   ✓     EcoView Optimizer   ✓     Overdrive   ✓     No flickering   ✓     HDCP Decoder   ✓     Automatic signal input recognition   ✓     Built-in speakers   ✓     On-screen menu languages   de, en, fr, es, it, se     Adjustment options   Color Mode, Brightness, Contrast, Color temperatu<br>/White point, Gamma, Overdrive, Colour tone, Colo<br>saturation, Resolucion, Scaling, OSD language, Signi<br>input, All EcoView functions, Volume     Button Guide   ✓     Integrated power unit   ✓     ELECTRICAL DATA   Frequency     Power consumption (typical) [in<br>watts]   11     Maximum Power Consumption [in<br>watts]   37 (at maximum brightness with all signal inputs and<br>USB ports in use)     Max. Power consumption in stand-by<br>watts off [in watts]   0.5     Power consumption with power   0     switch off [in watts]   0     Power supply   AC 100-120 V / 200-240 V, 50/60 Hz     Power management   ✓     DIMENSIONS & WEIGHT   499 x 334-474 x 233     Weight (incl. stand) (width x   499 x 331 x 54   | DICOM tone curve                      | ✓  |
| EcoView Optimizer   ✓     Overdrive   ✓     No flickering   ✓     HDCP Decoder   ✓     Automatic signal input recognition   ✓     Built-in speakers   ✓     On-screen menu languages   de. en. fr. es. it. se     Adjustment options   Color Mode, Brightness, Contrast, Color temperatur, All EcoView functions, Volume     Button Guide   ✓     Integrated power unit   ✓     ELECTRICAL DATA   Frequency     Power consumption (typical) [in usts)   11     Maximum Power Consumption [in usts]   37 (at maximum brightness with all signal inputs and USB ports in use)     Max. Power consumption in stand-by usts of fir watts]   0.5     Power consumption with power oswitch off [in watts]   0     Power supply   AC 100-120 V / 200-240 V, 50/60 Hz     Power management   ✓     DIMENSIONS & WEIGHT   499 x 334-474 x 233     Peight (incl. stand) (width x   499 x 321 x 54   | Auto EcoView                          | ✓  |
| Overdrive   ✓     No flickering   ✓     HDCP Decoder   ✓     Automatic signal input recognition   ✓     Built-in speakers   ✓     On-screen menu languages   de. en. fr. es. it. se     Adjustment options   Color Mode, Brightness, Contrast, Color temperatur, White point, Gamma, Overdrive, Colour tone, Colo saturation, Resolution, Scaling, OSD language, Signi input, All EcoView functions, Volume     Button Guide   ✓     Integrated power unit   ✓     ELECTRICAL DATA   Frequency     Power consumption (typical) [in watts]   11     Maximum Power Consumption in stand-by USB ports in use)   0.5     Max. Power consumption with power usitch off [in watts]   0.5     Power consumption with power usitch off [in watts]   0     Energy efficiency class   C     Energy efficiency class   C     Energy efficiency class   C     Energy efficiency class   C     Dimensions (incl. stand) (width x   499 x 334-474 x 233     Neight x depth) [in mn]   499 x 321 x 54  | EcoView Index                         | ✓  |
| No flickering   ✓     HDCP Decoder   ✓     Automatic signal input recognition   ✓     Built-in speakers   ✓     On-screen menu languages   de, en, fr, es, it, se     Adjustment options   Color Mode, Brightness, Contrast, Color temperatur, White point, Gamma, Overdrive, Colour tone, Colos saturation, Resolution, Scaling, OSD language, Signatinput, All EcoView functions, Volume     Button Guide   ✓     Integrated power unit   ✓     ELECTRICAL DATA   Frequency     Power consumption (typical) [in watts]   11     Maximum Power Consumption [in watts]   37 (at maximum brightness with all signal inputs and USB ports in use)     Max. Power consumption in stand-by 0.5   0.5     Max. Power consumption with power 0   0     switch off [in watts]   0     Power consumption/1000h [in kWh]   11     Power supply   AC 100-120 V / 200-240 V, 50/60 Hz     Power management   ✓     DIMENSIONS 8 WEIGHT   499 x 334-474 x 233     Weight (incl. stand) (width x   499 x 321 x 54  | EcoView Optimizer                     | ✓  |
| HDCP Decoder   ✓     Automatic signal input recognition   ✓     Built-in speakers   ✓     On-screen menu languages   de, en, fr, es, it, se     Adjustment options   Color Mode, Brightness, Contrast, Color temperatu, White point, Gamma, Overdrive, Colour tone, Colou saturation, Resolution, Scaling, OSD language, Signation, Resolution, Scaling, Signation, Resolution, Scaling, Signation, Resolution, Scaling, Resolution, Scaling, Resolution, Scaling, Resolution, Resolutin, Resolutin, Resolutin, Resolution, Resolutin, Resolution, Reso | Overdrive                             | ✓  |
| Automatic signal input recognition   ✓     Built-in speakers   ✓     On-screen menu languages   de, en, fr, es, it, se     Adjustment options   Color Mode, Brightness, Contrast, Color temperatu, White point, Gamma, Overdrive, Colour tone, Colos saturation, Resolution, Scaling, OSD language, Signa input, All EcoView functions, Volume     Button Guide   ✓     Integrated power unit   ✓     ELECTRICAL DATA   Frequency     Power consumption (typical) [in watts]   11     Maximum Power Consumption in stand-by mode [in watts]   37 (at maximum brightness with all signal inputs and USB ports in use)     Max. Power consumption with power switch off [in watts]   0.5     Power supply   AC 100-120 V / 200-240 V, 50/60 Hz     Power supply   AC 100-120 V / 200-240 V, 50/60 Hz     Power management   ✓     DIMENSIONS & WEIGHT   499 x 334-474 x 233     Meight (incl. stand) (width x 499 x 321 x 54   499 x 321 x 54   | No flickering                         | ✓  |
| Built-in speakers   ✓     On-screen menu languages   de, en, fr, es, it, se     Adjustment options   Color Mode, Brightness, Contrast, Color temperatu, //White point, Gamma, Overdrive, Colou tone, Colo saturation, Resolution, Scaling, OSD language, Signa input, All EcoView functions, Volume     Button Guide   ✓     Integrated power unit   ✓     ELECTRICAL DATA   Frequency     Display Port: 31-75,5 kHz/59-61 Hz; HDMI: 15-75,5 kH 49-61 Hz, 59-61 Hz; D-Sub: 31-75,5 kHz/59-61 Hz     Power consumption (typical) [in watts]   11     Maximum Power Consumption [in watts]   37 (at maximum brightness with all signal inputs and USB ports in use)     Max. Power consumption in stand-by mode [in watts]   0.5     Power consumption with power   0     switch off [in watts]   0     Power supply   AC 100-120 V / 200-240 V, 50/60 Hz     Power supply   AC 100-120 V / 200-240 V, 50/60 Hz     Power supply   AC 100-120 V / 200-240 V, 50/60 Hz     Power management   ✓     UMENSIONS & WEIGHT   499 x 334-474 x 233     Dimensions (incl. stand) (width x 499 x 321 x 54  | HDCP Decoder                          | ✓  |
| On-screen menu languages   de, en, fr, es, it, se     Adjustment options   Color Mode, Brightness, Contrast, Color temperatu, //White point, Gamma, Overdrive, Colous saturation, Resolution, Scaling, OSD language, Signa input, All EcoView functions, Volume     Button Guide   ✓     Integrated power unit   ✓     ELECTRICAL DATA   Frequency     Display Port: 31-75,5 kHz/59-61 Hz; HDMI: 15-75,5 kH 49-61 Hz; 59-61 Hz; D-Sub: 31-75,5 kHz/59-61 Hz     Power consumption (typical) [in watts]   11     Maximum Power Consumption [in watts]   37 (at maximum brightness with all signal inputs and USB ports in use)     Max. Power consumption in stand-by mode [in watts]   0.5     Power consumption with power switch off [in watts]   0     Energy efficiency class   C     Energy efficiency class   C     Energy efficiency class   C     Dimensions (incl. stand) (width x hgg x 334-474 x 233 height x depth) [in mm]   499 x 334-474 x 233 height x depth) [in mm]     Weight (incl. stand) (width x 499 x 321 x 54   499 x 321 x 54   | Automatic signal input recognition    | ✓  |
| Adjustment options   Color Mode, Brightness, Contrast, Color temperatu<br>/White point, Gamma, Overdrive, Colour tone, Colo<br>saturation, Resolution, Scaling, OSD language, Signa<br>input, All EcoView functions, Volume     Button Guide   ✓     Integrated power unit   ✓     ELECTRICAL DATA   Frequency     Power consumption (typical) [in<br>watts]   11     Maximum Power Consumption [in<br>watts]   37 (at maximum brightness with all signal inputs and<br>USB ports in use)     Max. Power consumption in stand-by<br>worde [in watts]   0.5     Power consumption with power<br>switch off [in watts]   0     Power supply   AC 100-120 V / 200-240 V, 50/60 Hz     Power management   ✓     DIMENSIONS & WEIGHT   499 x 334-474 x 233     Dimensions (incl. stand) (width x<br>height x depth) [in mn]   499 x 321 x 54   | Built-in speakers                     | ✓  |
| /White point, Gamma, Overdrive, Colour tone, Colo saturation, Resolution, Scaling, OSD language, Signa input, All EcoView functions, Volume     Button Guide   ✓     Integrated power unit   ✓     ELECTRICAL DATA   Frequency     Power consumption (typical) [in watts]   11     Maximum Power Consumption [in watts]   37 (at maximum brightness with all signal inputs and USB ports in use)     Max. Power consumption in stand-by mode [in watts]   0.5     Power consumption with power   0     switch off [in watts]   0     Energy efficiency class   C     Energy efficiency class   C     Energy efficiency class   C     Dimensions (incl. stand) (width x height x depth) [in mm]   499 x 334-474 x 233     Weight (incl. stand) [in kg]   5.5     Dimensions (without stand) (width x 499 x 321 x 54  | On-screen menu languages              | de, en, fr, es, it, se   |
| Integrated power unit   ✓     ELECTRICAL DATA     Frequency   Display Port: 31-75,5 kHz/59-61 Hz; HDMI: 15-75,5 kH 49-61 Hz; 59-61 Hz; D-Sub: 31-75,5 kHz/59-61 Hz     Power consumption (typical) [in watts]   11     Maximum Power Consumption [in watts]   37 (at maximum brightness with all signal inputs and USB ports in use)     Max. Power consumption in stand-by mode [in watts]   0.5     Power consumption with power switch off [in watts]   0     Energy efficiency class   C     Energy consumption/1000h [in kWh]   11     Power supply   AC 100-120 V / 200-240 V, 50/60 Hz     Power management   ✓     DIMENSIONS & WEIGHT   199 x 334-474 x 233     Pieght (incl. stand) [in kg]   5.5     Dimensions (without stand) (width x 499 x 321 x 54  | Adjustment options                    | Color Mode, Brightness, Contrast, Color temperature<br>/White point, Gamma, Overdrive, Colour tone, Color<br>saturation, Resolution, Scaling, OSD language, Signal<br>input, All EcoView functions, Volume |
| ELECTRICAL DATA     Frequency   Display Port: 31-75,5 kHz/59-61 Hz; HDMI: 15-75,5 kH 49-61 Hz; D-Sub: 31-75,5 kHz/59-61 Hz     Power consumption (typical) [in watts]   11     Maximum Power Consumption [in watts]   37 (at maximum brightness with all signal inputs and USB ports in use)     Max. Power consumption in stand-by mode [in watts]   0.5     Power consumption with power onsumption with power switch off [in watts]   0.5     Energy efficiency class   C     Energy consumption/1000h [in kWh]   11     Power supply   AC 100-120 V / 200-240 V, 50/60 Hz     Power management   ✓     DIMENSIONS & WEIGHT   499 x 334-474 x 233     Dimensions (incl. stand) [in kg]   5.5     Dimensions (without stand) (width x 499 x 321 x 54  | Button Guide                          | ✓  |
| Frequency   Display Port: 31-75,5 kHz/59-61 Hz; HDMI: 15-75,5 kH     Power consumption (typical) [in   11     Maximum Power Consumption [in   37 (at maximum brightness with all signal inputs and USB ports in use)     Max. Power consumption in stand-by   0.5     mode [in watts]   0.5     Power consumption with power   0     switch off [in watts]   0     Power supply   AC 100-120 V / 200-240 V, 50/60 Hz     Power management   ✓     DIMENSIONS & WEIGHT   499 x 334-474 x 233     Poingent (incl. stand) [in kg]   5.5     Dimensions (without stand) (width x   499 x 321 x 54   | Integrated power unit                 | ✓  |
| Frequency   Display Port: 31-75,5 kHz/59-61 Hz; HDMI: 15-75,5 kH     Power consumption (typical) [in   11     Maximum Power Consumption [in   37 (at maximum brightness with all signal inputs and USB ports in use)     Max. Power consumption in stand-by   0.5     mode [in watts]   0.5     Power consumption with power   0     switch off [in watts]   0     Power supply   AC 100-120 V / 200-240 V, 50/60 Hz     Power management   ✓     DIMENSIONS & WEIGHT   499 x 334-474 x 233     Poingent (incl. stand) [in kg]   5.5     Dimensions (without stand) (width x   499 x 321 x 54   |                                       |  |
| 49-61 Hz, 59-61 Hz; D-Sub: 31-75,5 kHz/59-61 Hz     Power consumption (typical) [in watts]   11     Maximum Power Consumption [in watts]   37 (at maximum brightness with all signal inputs and USB ports in use)     Max. Power consumption in stand-by mode [in watts]   0.5     Power consumption with power switch off [in watts]   0.5     Energy efficiency class   C     Energy efficiency class   C     Power supply   AC 100-120 V / 200-240 V, 50/60 Hz     Power management   ✓     DIMENSIONS & WEIGHT   11     Pimensions (incl. stand) (width x height x depth) [in mm]   499 x 334-474 x 233     Weight (incl. stand) [in kg]   5.5     Dimensions (without stand) (width x 499 x 321 x 54   |                                       |  |
| watts]   37 (at maximum brightness with all signal inputs and USB ports in use)     Max. Power consumption in stand-by mode [in watts]   0.5     Power consumption with power or switch off [in watts]   0.5     Energy efficiency class   C     Energy consumption/1000h [in kWh]   11     Power supply   AC 100-120 V / 200-240 V, 50/60 Hz     Power management   ✓     DIMENSIONS & WEIGHT   11     Dimensions (incl. stand) (width x height x depth) [in mm]   499 x 334-474 x 233     Weight (incl. stand) [in kg]   5.5     Dimensions (without stand) (width x 499 x 321 x 54   | Frequency                             |  |
| watts] USB ports in use)   Max. Power consumption in stand-by<br>mode [in watts] 0.5   Power consumption with power<br>switch off [in watts] 0   Energy efficiency class C   Energy consumption/1000h [in kWh] 11   Power supply AC 100-120 V / 200-240 V, 50/60 Hz   Power management ✓   DIMENSIONS & WEIGHT 11   Dimensions (incl. stand) (width x<br>height x depth) [in mm] 499 x 334-474 x 233   Weight (incl. stand) [in kg] 5.5   Dimensions (without stand) (width x 499 x 321 x 54  |                                       | 11   |
| mode [in watts]   0     Power consumption with power switch off [in watts]   0     Energy efficiency class   C     Energy consumption/1000h [in kWh]   11     Power supply   AC 100-120 V / 200-240 V, 50/60 Hz     Power management   ✓     DIMENSIONS & WEIGHT   10     Dimensions (incl. stand) (width x height x depth) [in mm]   499 x 334-474 x 233     Weight (incl. stand) [in kg]   5.5     Dimensions (without stand) (width x 499 x 321 x 54   |                                       | 37 (at maximum brightness with all signal inputs and USB ports in use)   |
| switch off [in watts]     Energy efficiency class   C     Energy consumption/1000h [in kWh]   11     Power supply   AC 100-120 V / 200-240 V, 50/60 Hz     Power management   ✓     DIMENSIONS & WEIGHT   ✓     Dimensions (incl. stand) (width x   499 x 334-474 x 233     Weight (incl. stand) [in kg]   5.5     Dimensions (without stand) (width x   499 x 321 x 54   |                                       | 0.5  |
| Energy consumption/1000h [in kWh] 11<br>Power supply AC 100-120 V / 200-240 V, 50/60 Hz<br>Power management ✓<br>DIMENSIONS & WEIGHT<br>Dimensions (incl. stand) (width x 499 x 334-474 x 233<br>height x depth) [in mm]<br>Weight (incl. stand) [in kg] 5.5<br>Dimensions (without stand) (width x 499 x 321 x 54  |                                       | 0  |
| Power supply   AC 100-120 V / 200-240 V, 50/60 Hz     Power management   ✓     DIMENSIONS & WEIGHT   ✓     Dimensions (incl. stand) (width x height x depth) [in mm]   499 x 334-474 x 233     Weight (incl. stand) [in kg]   5.5     Dimensions (without stand) (width x 499 x 321 x 54  | Energy efficiency class               | С  |
| Power management ✓   DIMENSIONS & WEIGHT   Dimensions (incl. stand) (width x 499 x 334-474 x 233   height x depth) [in mm] 5.5   Weight (incl. stand) [in kg] 5.5   Dimensions (without stand) (width x 499 x 321 x 54  | Energy consumption/1000h [in kWh]     | 11   |
| DIMENSIONS & WEIGHT     Dimensions (incl. stand) (width x     499 x 334-474 x 233     height x depth) [in mm]     Weight (incl. stand) [in kg]   5.5     Dimensions (without stand) (width x   499 x 321 x 54   | Power supply                          | AC 100-120 V / 200-240 V, 50/60 Hz   |
| Dimensions (incl. stand) (width x   499 x 334-474 x 233     height x depth) [in mm]   -     Weight (incl. stand) [in kg]   5.5     Dimensions (without stand) (width x   499 x 321 x 54   | Power management                      | ✓  |
| Dimensions (incl. stand) (width x<br>height x depth) [in mm] 499 x 334-474 x 233   Weight (incl. stand) [in kg] 5.5   Dimensions (without stand) (width x 499 x 321 x 54  | DIMENSIONS & WEIGHT                   |  |
| Dimensions (without stand) (width x 499 x 321 x 54  | Dimensions (incl. stand) (width x     | 499 x 334-474 x 233  |
|   | Weight (incl. stand) [in kg]          | 5.5  |
|   |                                       | 499 x 321 x 54   |
| Weight (without stand) [in kg] 3.4  | Weight (without stand) [in kg]        | 3.4  |
| Dimension drawing (PDF) Dimension drawing (PDF)   | Dimension drawing (PDF)               | Dimension drawing (PDF)  |
| Rotatability of the stand [in °] 344  | Rotatability of the stand [in °]      | 344  |
| Tiltability forwards/backwards [in °] 5 / 35  | Tiltability forwards/backwards [in °] | 5 / 35   |
| Pivot between portrait / landscape clockwise and anti-clockwise   | Pivot between portrait / landscape    | clockwise and anti-clockwise   |
| Height adjustment range [in mm] 140   | Height adjustment range [in mm]       | 140  |
| Hole spacing 100 x 100  | Hole spacing                          | 100 × 100  |



#### CERTIFICATION & STANDARDS

| Certification  | CE, CB, TÜV/GS, TÜV/Ergonomics (including ISO 9241<br>307), TCO Certified Generation 9, EPEAT 2018 (US),<br>TÜV/Low Blue Light Content, TÜV/Flicker Free, RCM,<br>cTÜVus, FCC-B, CAN ICES-3 (B), TÜV/S, PSE, VCCI-B,<br>EPA ENERGY STAR, ROHS, WEEE, China RoHS, CCC,<br>BIS, BSMI, EAC |
|--|---|
| SOFTWARE & ACCESSORIES   |   |
| Accompanying software and other<br>accessories are available for down-<br>load | Screen InStyle  |
| Other box contents   | USB cable (Type A - Type B), Signal cable DisplayPort<br>- DisplayPort, Manual via download, Power cord, Quick<br>guide   |
| Accessories  | PM200-K (DisplayPort cable to transfer digital video<br>and audio signals), CP200 (USB-C to DisplayPort<br>cable), HH200PR-K (HDMI (High Definition Multimedia<br>Interface) cable), PCSK-03 (Thin client mount)  |
| WARRANTY   |   |
| Warranty periode   | 5 years for unit and LCD module up to 30,000 opera-<br>ting hours, whichever comes first.   |
| Included warrantu  | Zero nixel defects guarantee: no fullu illuminated sub-   |

Zero pixel defects guarantee; no fully illuminated sub-pixels (sub-pixels ISO 9241-307) for six months from date of purchase. Included warranty



Experience the EV2360 in AR now!

Find your EIZO contact: EIZO Europe GmbH Belgrader Straße 2 41069 Mönchengladbach Phone: +49 2161 8210-0 www.eizo.eu

All product names are trademarks or registered trademarks of EIZO Corporation in Japan and other countries or their respective companies. Copyright © 2024 EIZO Europe GmbH, Belgrader Str. 2, 41069 Mönchengladbach, Germany. All rights, errors and modifications reserved. Latest update: 13.10.2024